

LEDX.NO

LED expert AS
Torpumveien 543
1788 Halden


E-post: post@ledx.no
Tlf: 909 54 606



RoHS



Ideal for parking lot, playground, square, park, highway, greenbelt
golf course, and etc.

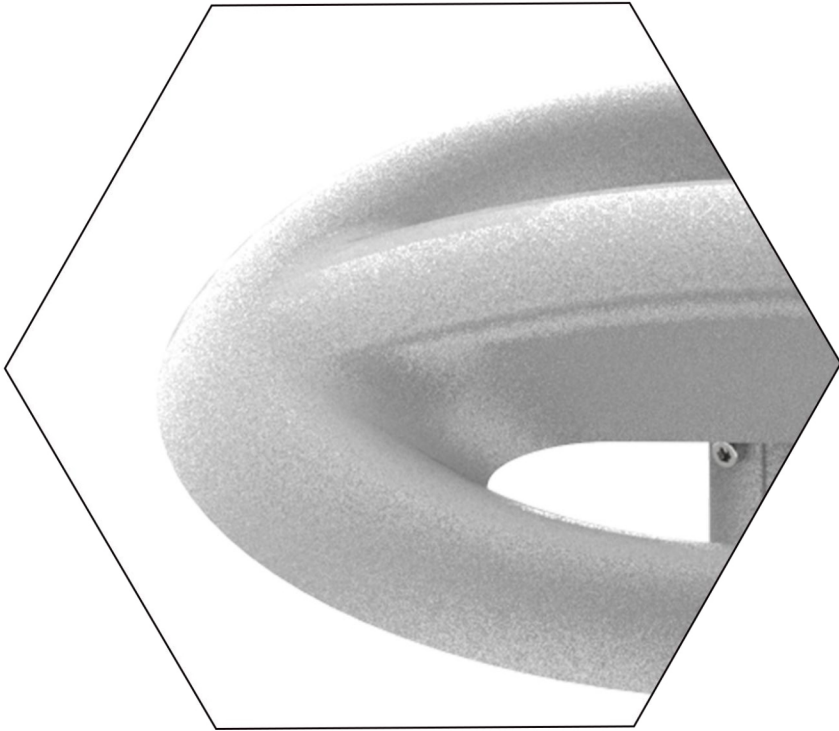

▶ **Unique Design**

Decorate your public space

▶ **Hydrophobic surface**

Too smooth to gather any dirt

▶ **Rust resistant**

All aluminium body

▶ **Highly Efficient System**


160Lm/w lighting output

▶ **IP66**

Integrated design protect the light from water & dirt


▶ **High robustness**

Provide long-term lighting

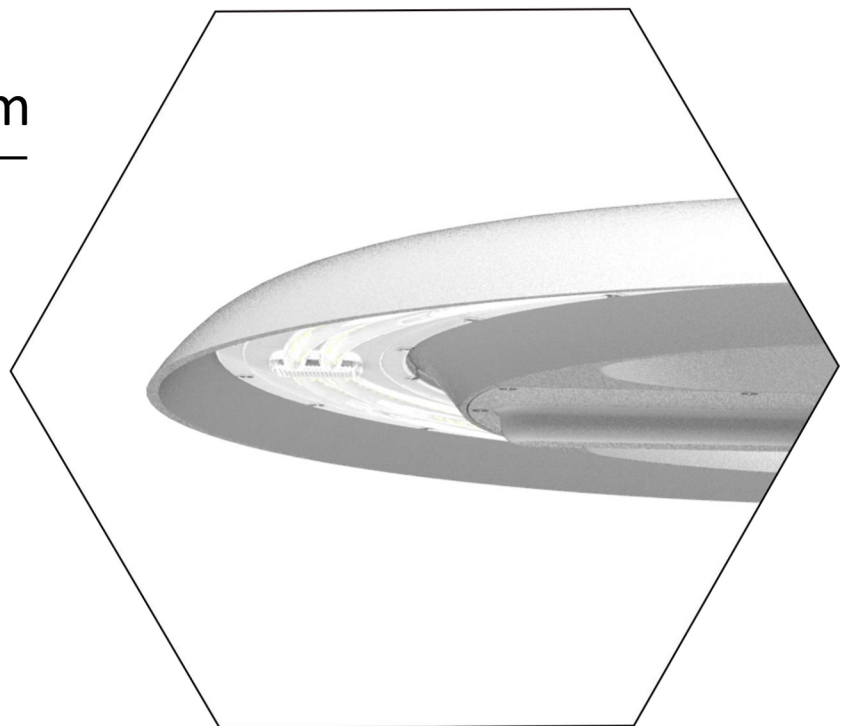

Parameters

WATTAGE	80/100/150/200/240W
DRIVER	MEANWELL
LAMP EFFICIENCY	160LM/W \pm 5%
LIGHT SOURCE	LUMIEDS
CRI	Ra>70/80
CCT	2700-6500K
RATED VOLTAGE	AC 100-240V 277V~,50/60Hz
POWER FACTOR	>0.95
BEAM ANGLE	60°/90°/120°
IP GRADE	IP66
OPERATING TEMP	-40°C~60°C
POLE SIZE	60/80mm

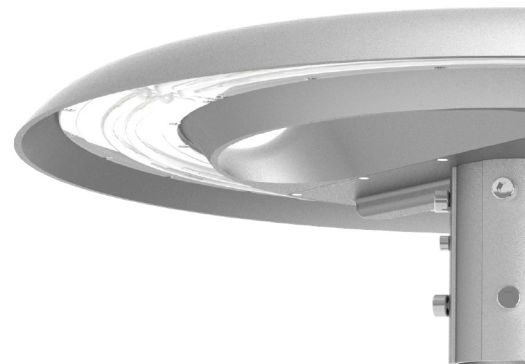

80W

12,800LM \pm 5%
4.0kg \pm 5%
 ϕ 380*162mm

100W

16,000LM \pm 5%
4.1kg \pm 5%
 ϕ 380*162mm

150W

24,000LM \pm 5%
4.2kg \pm 5%
 ϕ 380*162mm

200W




32,000LM \pm 5%
6.0kg \pm 5%
 ϕ 500*168mm

240W

38,400LM \pm 5%
6.0kg \pm 5%
 ϕ 500*168mm




LEDX.NO

Type A: 380mm series

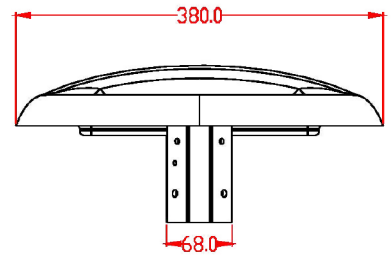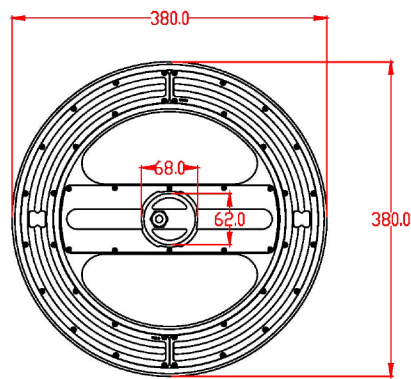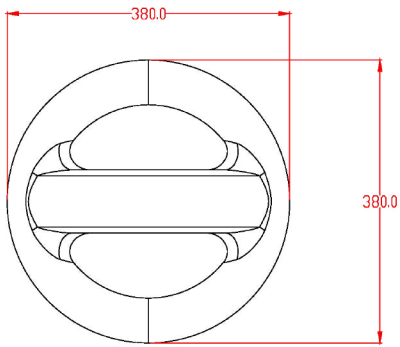

Wattage	Net Weight
80W	4.0kg ± 5%
100W	4.1kg ± 5%
150W	4.2kg ± 5%

Type B: 500mm series

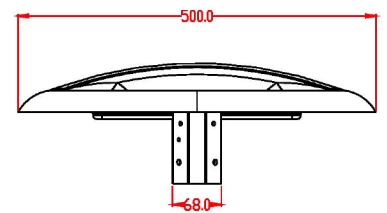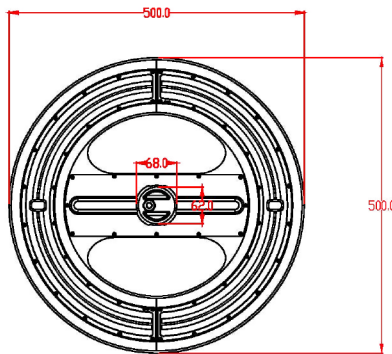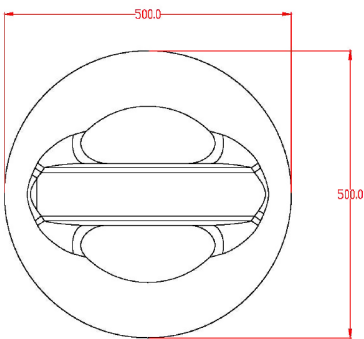

Wattage	Net Weight
200W	6.0kg ± 5%
240W	6.0kg ± 5%