



APPLICATIONS

Widely Applicable




to indoor and outdoor locations, waterproof. Suitable for sports centers, bridges, billboards, villa, outdoor walls and park lighting. Installation methods available are on floor, on ceiling, on wall or on high mast.

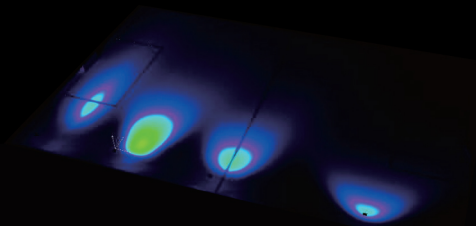

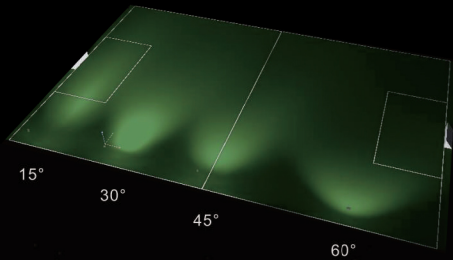

Green Sight
Spot Finder

Lighting Distributions

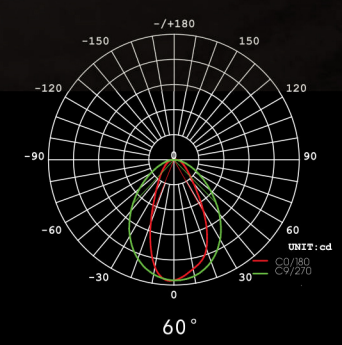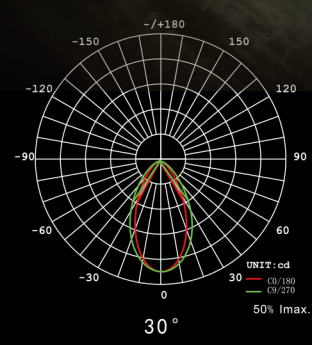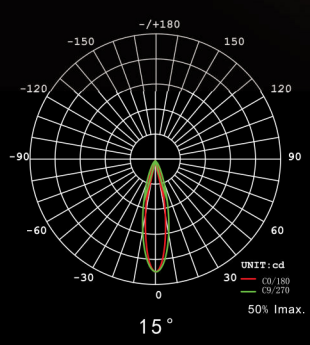

MAIN PARAMETERS

Power	500W	1000W	1500W	2000W
LED Qty	5050*228pcs/3030*920	5050*456pcs/3030*1840	5050*684pcs/3030*2760	5050*912pcs/3030*3680
Light effect	150lm/W	150lm/W	150lm/W	150lm/W
Input voltage	AC90-270V	AC90-270V	AC90-270V	AC90-270V
Protection level	IP66	IP66	IP66	IP66
Beam angle	15° 30° 45° 60°	15° 30° 45° 60°	15° 30° 45° 60°	15° 30° 45° 60°

ELECTRICAL**4KV SURGE PROTECTION****PHILIPS**

1 AC90-270V 50/60Hz universal voltage. 5 LED Driver IP65.


2 PF>0.95.

3 THD<15%

4 Surge protection 4KV.

6 Efficiency>92%, more energy-saving.

7 Start time 0.75S.




Brown: L

Blue: N


Yellow& Green: GND

INSTALLATION METHODS


Floor Mounted

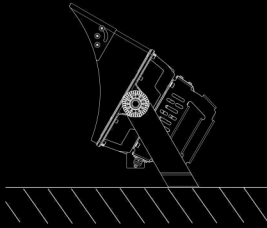


Ceiling Mounted

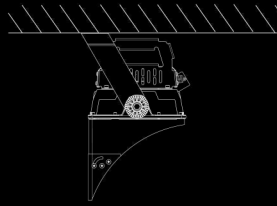


Wall Mounted

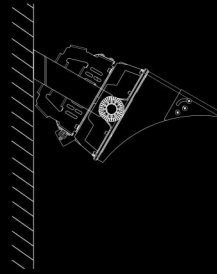



Pole Mounted




ASSEMBLING METHODS

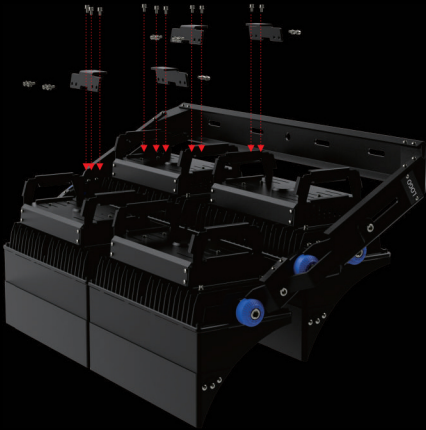



BRACKET ADJUSTMENT

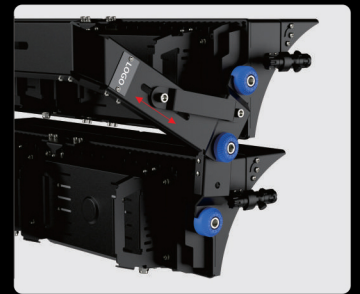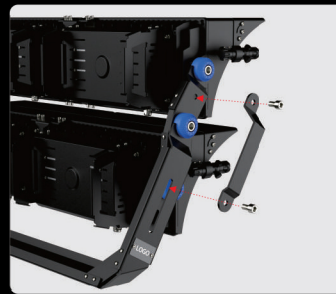



DIAGRAMS

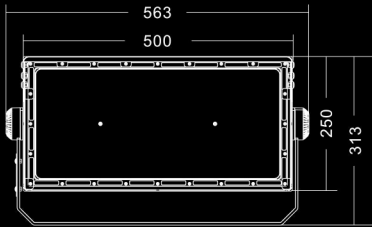



500W



1000W



1500W

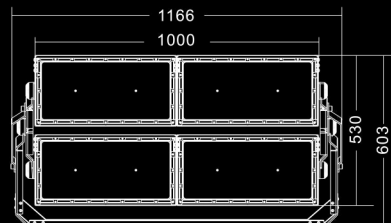

2000W

