







Better solutions for a Led Wall Pack Light

-  **IP65 water-proof**
 -  **AC100-277V 50/60Hz**
 -  **Easy Installation**
 -  **120Lm/w**
- Operating Temp.:** -20°C ~+50°C **Storage Temp.:** -40°C ~+80°C



Options

| | |
|---|---|
| Power MEAN WELL DRIVER(100W) -ELG series A:Standard -ELG series B:Dimmable 0-10V -ELG series DA:Dimmable DALI BREE DRIVER(30W/50W/100W) | Color 3000K 4000K 5700K |
|---|---|


Application

LED Wall Pack Light series can be widely used as Exterior or interior LED lighting for Hotels, Garages, Commercial Buildings, Public areas, Schools and Hospitals, etc.

Specifications

| Power | Lumen | Leds | CRI | Weight | Beam Angle |
|-------|---------|---------------|-----|--------|------------|
| 30W | 3600Lm | LUMILEDS 3030 | >80 | 1.45KG | 120° |
| 50W | 6000Lm | LUMILEDS 3030 | >80 | 1.45KG | 120° |
| 100W | 12000Lm | LUMILEDS 3030 | >80 | 3.70KG | 120° |

Dimensions(mm)

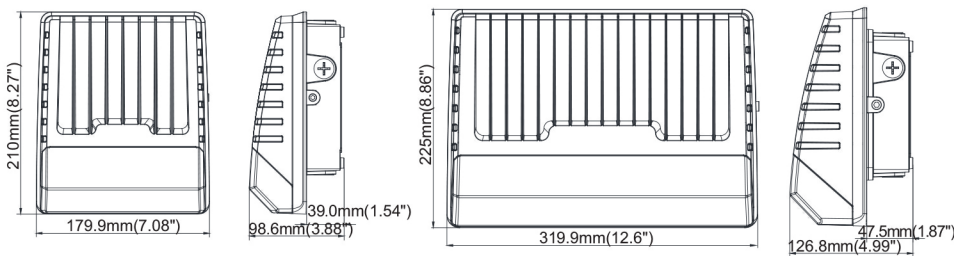

30W/50W

100W

Photometry

