



Better solutions for Led Wall Pack Light



Operating Temp: -40°C ~+50°C(C5)
-20°C~+50°C(C4)

Storage Temp: -40°C~+80°C



Options

Driver

Sosen Driver
UL/TUV/CE/SAA Driver

Voltage

AC100-277V for C4(30W/50W)
AC120-277V for C4/C5
AC120-347V for C5

CCT

3000K
4000K
5000K


Application

LED Wall Pack Light series can be widely used as Exterior or interior LED lighting for Hotels, Garages, Commercial Buildings, Public areas, Schools and Hospitals, etc.



Specifications

Power	Luminous Ef ficacy	Leds	CRI	Weight	Lens
30W	140Lm/W	SMD 3030	>80	1.85KG(4.10lbs)	130x60°
50W	140Lm/W	SMD 3030	>80	1.85KG(4.10lbs)	130x60°
80W	140Lm/W	SMD 3030	>80	4.50KG(9.92lbs)	130x60°
100W	140Lm/W	SMD 3030	>80	4.50KG(9.92lbs)	130x60°


Dimensions(mm)

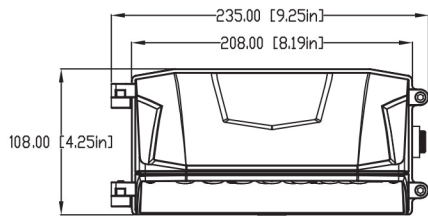


30W/50W

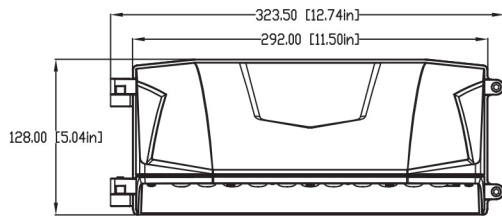

80W/100W




Photometry

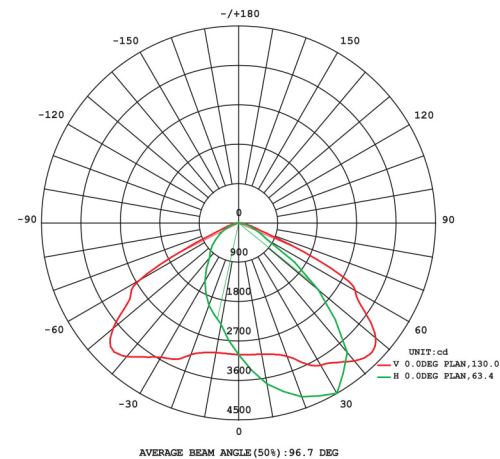

130x60°

Sensor Optional

Thermal Type Photocontrol (Button type Wire-in)

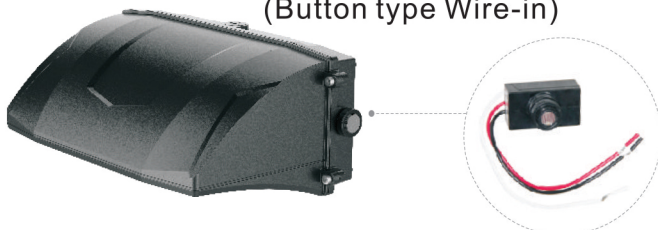

Thermal Type Photocontrol (Swivel & Wire-in)

