

CL
IP 64

IK10



Application: Antivandal lighting fixture CL with dust and splash water resistance is designed for areas with high risk of damage, i.e prison cells, psychiatric hospitals, gyms and pedestrian subways.

Ballast: EP – electronic 220-240 V / 50-60 Hz AC, 220-240 V DC 0Hz

Light source: LED, 4000K, CRI +80, MacAdam3

Housing: White painted steel sheet RAL 9016

Diffuser: Combination of painted sheet RAL 9016 and opal polycarbonate diffuser


Reflector: Highly polished aluminium sheet

Fastening: Surface wall or ceiling mounting


Connection: Screwless three-pole terminal block, maximum diameter of wires 2.5 mm². The lighting fixture is prepared for loop-in (possibility of connection of two cables)

Standard equipment: 2 pcs cable gland, washers with rubber to seal mounting holes, safety screws (it is necessary to order additionally 004778 - Bit for safety screw with socket head and pin s=3)

Calculated lifetime – LED modules: L80B10 ta30 – 70 000h
L70B10 ta30 – 100 000h

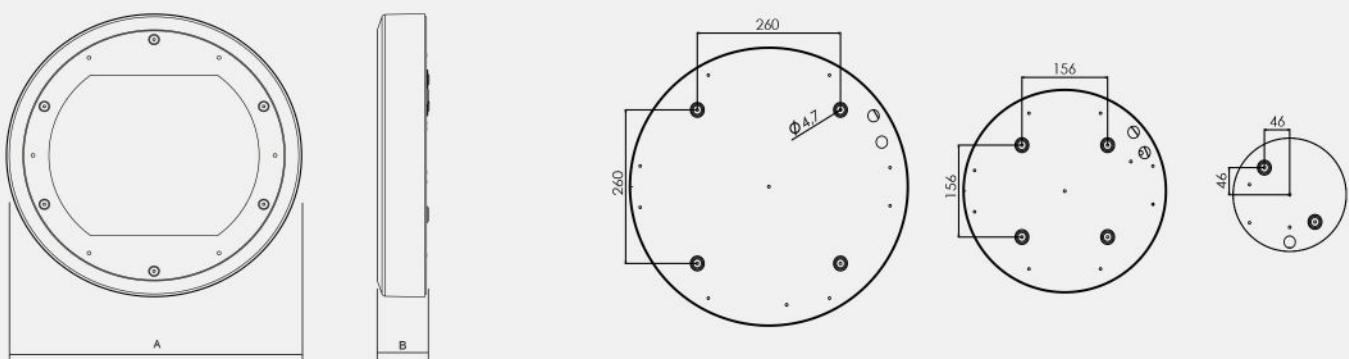

Lighting fixture luminous flux (lm)	Power input (W)	Rated power output (lm/W)	Ta max (°C)	Dimensions of lighting fixture A x B (mm)	Weight (kg)
4472	43	104	30	505x63	7,5
1916	18	106	30	370x63	4,2



Tolerance of luminous flux and power input of the lighting fixture +/- 10%