

Dimensions(Unit:mm)


0.6M



1.2M



1.5M

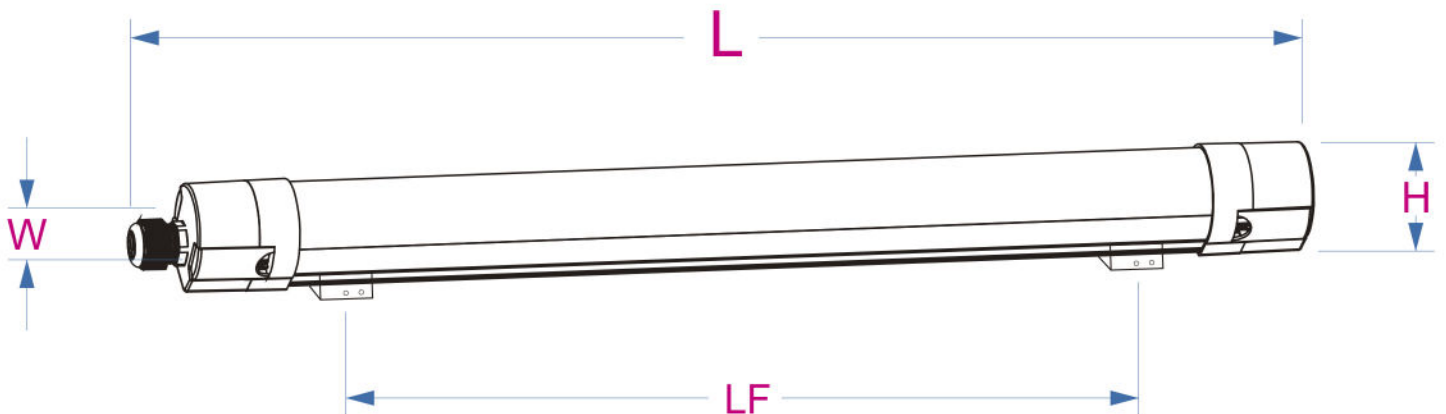


Power	Product Size(L*W*H)	Fixing Hole Centre(LF)
18W	L650*W59*H60mm	470mm
36W	L1200*W59*H60mm	1020mm
50W	L1500*W59*H60mm	1320mm

Lamp body front




Backside of lamp body

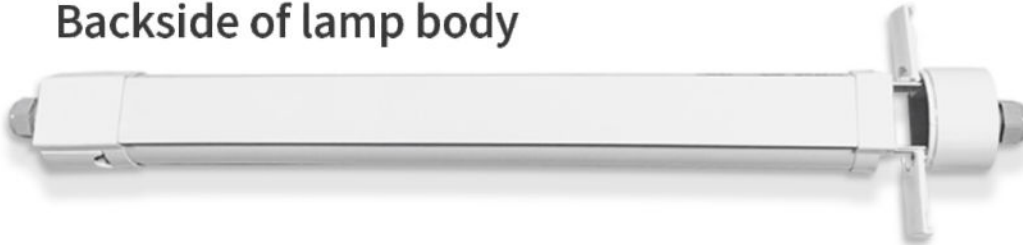

Front side of the light board



Back side of the light board



Power Adjustable

PRODUCTDESCRIPTION

- Body: PC Extrusion molding
- PC material, could meet Ik08 and 750 GWT requirement
- other characteristics :pollutionfree ,low power consumption,high luminou sefficiency &IP65
- High-low impact,high humidity environmental tests

18 W

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.08A	DC48V	0.35A	18W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	145LM/W	150LM/W	150LM/W
SMD2835	48PCS	≥80Ra	Luminous flux	2610LM±10%	2700LM±10%	2700LM±10%
			Beam Angle	120°		
120LM/W & 150LM/W & 180LM/W are all available						
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	L650*W59*H60mm	0.58Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L690*W61.5*H61.5mm	0.67Kg	
Outer carton package	12*1layer=12PCS/carton,K=K corrugated paper, L705*W203*H265mm,GW:8.55KG					
Optional dimming type	0-10V Dimming					
Power Adjustable	0.35A—18W、0.3A—16W、0.25A—14W、0.2A—12W					

36 W

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.15A	DC99V	0.35A	36W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	145LM/W	150LM/W	150LM/W
SMD2835	132PCS	≥80Ra	Luminous flux	5220LM±10%	5400LM±10%	5400LM±10%
			Beam Angle	120°		
120LM/W & 150LM/W & 180LM/W are all available						
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	L1200*W59*H60mm	0.77Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20℃to+50℃	-30℃to+60℃	10-80%RH	10-90%RH	L1240*W61.5*H61.5mm	0.94Kg	
Outer carton package	9*1layer=9PCS/carton,K=K corrugated paper, L1255*W203*H203mm,GW:9.85KG					
Optional dimming type	0-10V Dimming					
Power Adjustable	0.35A—36W、0.3A—30W、0.25A—24W、0.2A—20W					

50W

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.21A	DC138V	0.35A	50W	≥0.95	
LED Type	LED Q'ty	CRI	CCT	2900-3100K	4000-4500K	5500-6000K
			Luminous efficiency	145LM/W	150LM/W	150LM/W
SMD2835	184PCS	≥80Ra	Luminous flux	7250LM±10%	7500LM±10%	7500LM±10%
			Beam Angle	120°		
120LM/W & 150LM/W & 180LM/W are all available						
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
50.000Hours	CE,RoHS	IP65	Class I	L1500*W59*H60mm	1.01Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20°Cto+50°C	-30°Cto+60°C	10-80%RH	10-90%RH	L1540*W61.5*H61.5mm	1.21Kg	
Outer carton package	9*1layer=9PCS/carton,K=K corrugated paper, L1555*W203*H203mm,GW:11.7KG					
Optional dimming type	0-10V Dimming					
Power Adjustable	0.35A—50W、0.3A—42W、0.25A—34W、0.2A—26W					

Test report

